
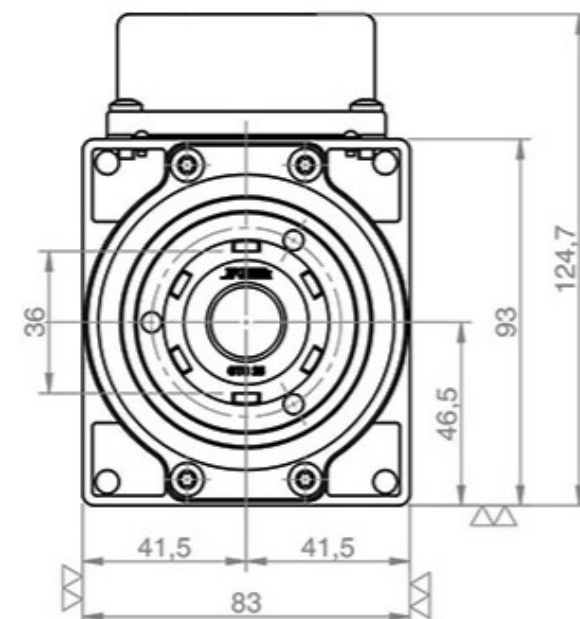
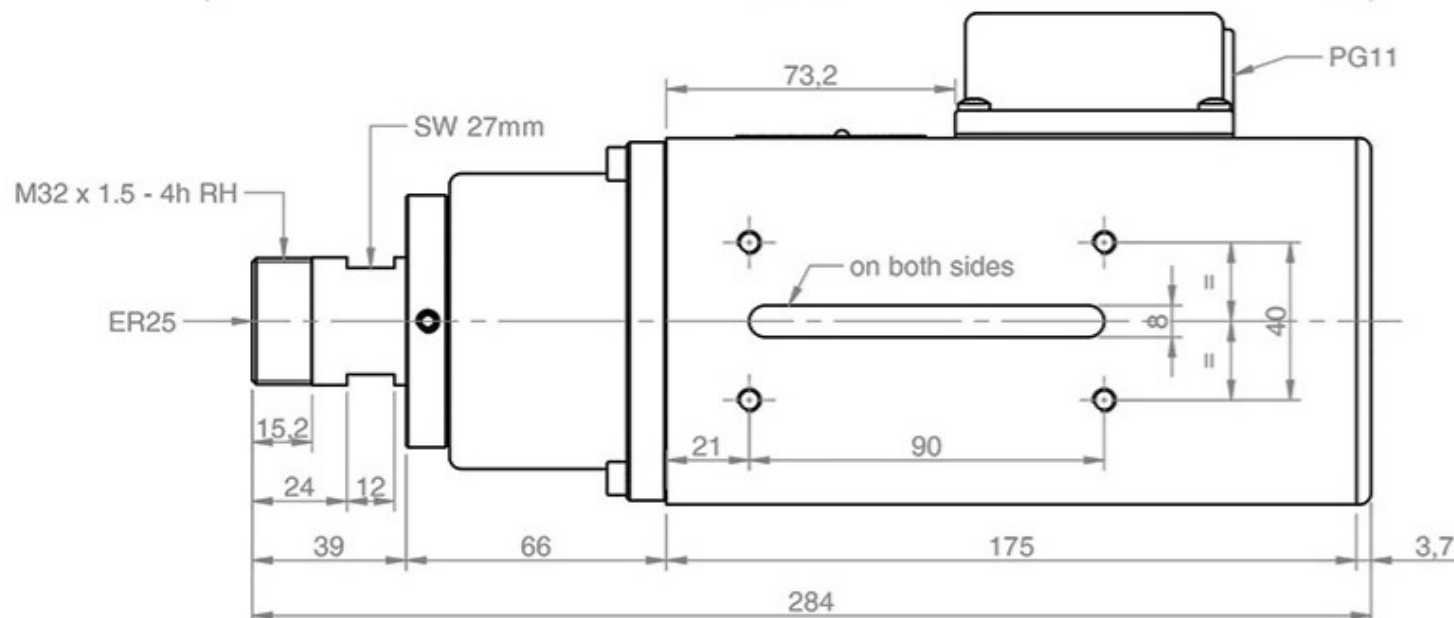
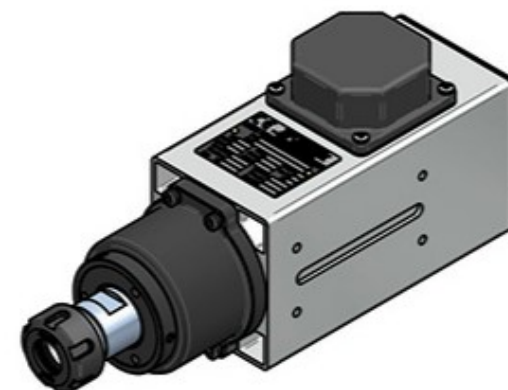


Ghiera serraggio
GTS25 RH

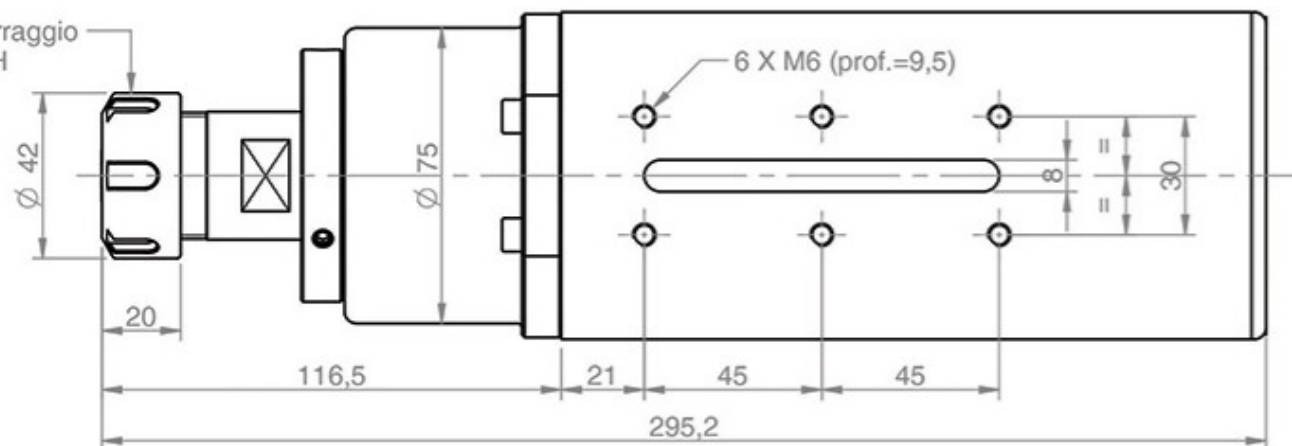

Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]
1.1	S1	18000	300	220	5.0	380	2.9
Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]
Min speed [rpm]	Max speed [rpm]	Max freq. [Hz]	Protection	Ins. Cl.	Part number on nameplate		
6000	18000	300	IP54	F	COM41470201		
Balancing according to ISO 1940 - G2.5 @ 18000 rpm	Balancing type	tool type	full key	tool type	half key	Peso / weight	Title
						6.67 kg	4147-A-DB-P-ER25-RH
rev. n°	description				date	signature	Customer
00	Emissione				15/02/2010	D. Bottarel	Catalogo
							Drawing code
							COM41470201
drawn - date	approved - date	checked - date	sostituisce il		foglio / sheet	scala	
D. Bottarel - 15/02/2010	S. Perli - 15/02/2010	S. Perli - 15/02/2010	sostituito dal		1 / 1	1:2	

TEKNOMOTOR

Teknomotor S.r.l.
Via Argemone 31, I-32038 Quero Vas (BL)
www.teknomotor.com

Tolleranze non quotate: UNI EN 22768 fH
Smussi non quotate: 0.5 mm
Rugosità secondo UNI ISO 1302