
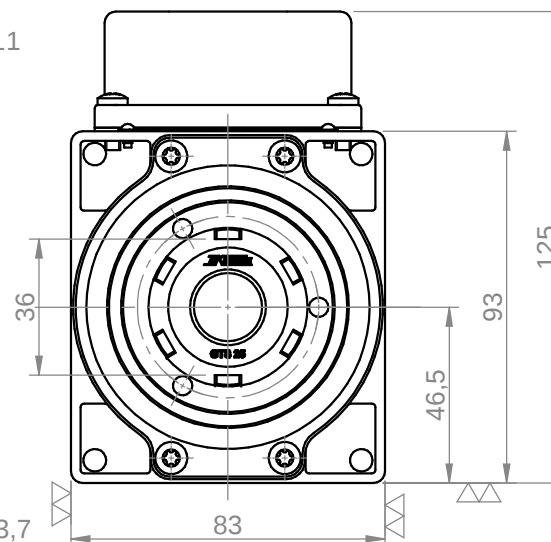
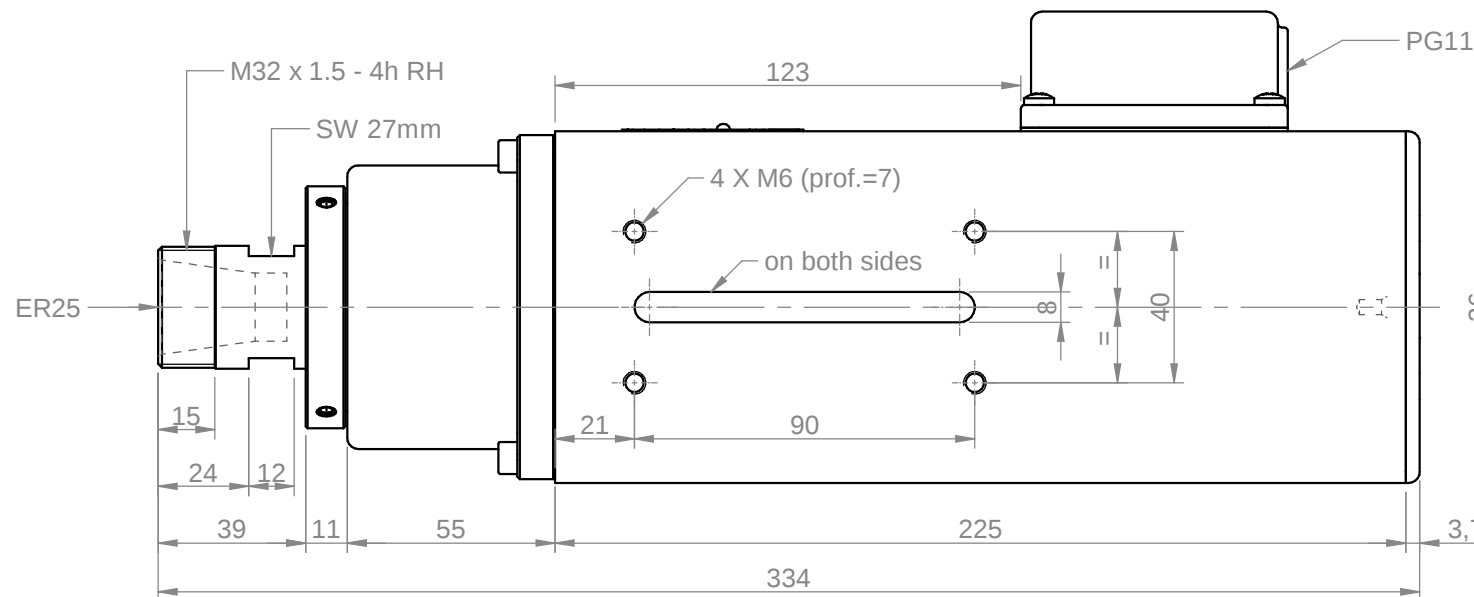
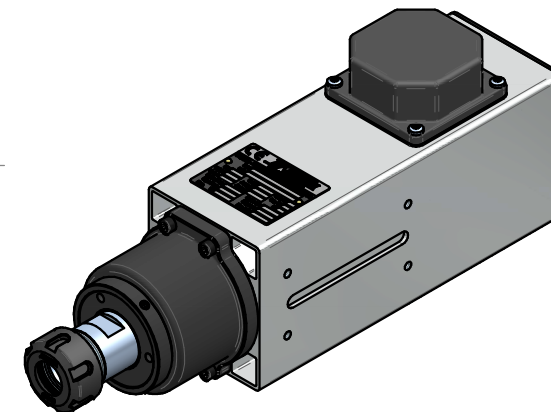


Ghiera serraggio
GTS25 RH

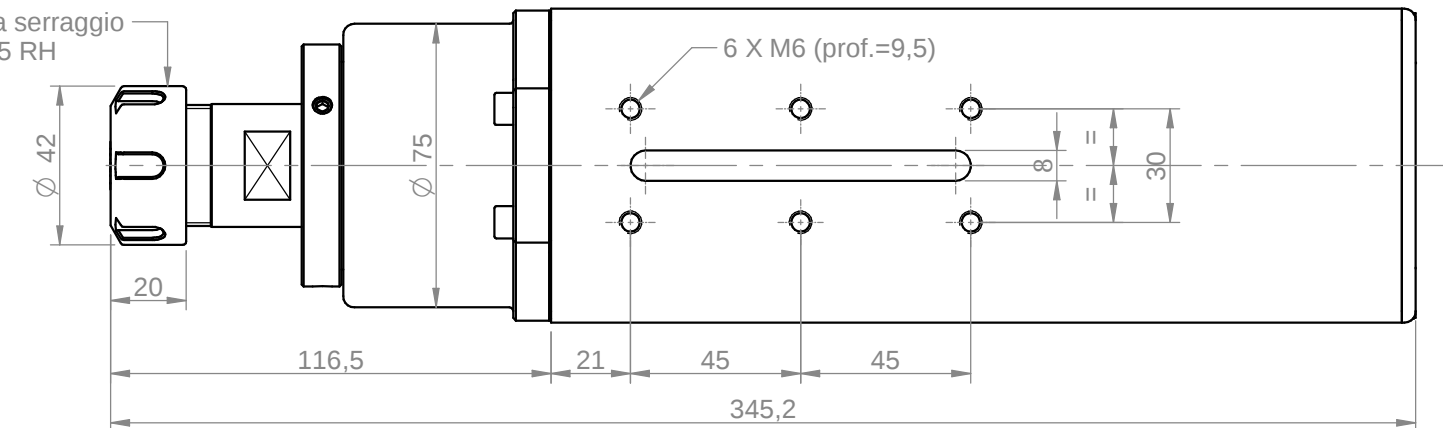

Power [kW] 2.0	Duty Cycle S1	Base speed [rpm] 18000	Base freq. [Hz] 300	Base voltage Δ [V] 220	Base voltage Y [V] 380	Protection IP54	Ins. Cl. F	 Teknomotor S.r.l. Via Argenega 31, I-32038 Quero Vas (BL) www.teknomotor.com		
Min speed [rpm] 6000		Max speed [rpm] 18000	Max freq. [Hz] 300	Absorb. Δ [A] 8.6	Absorb. Y [A] 5.0	Part number on nameplate COM41470244				
Balancing according to ISO 1940 - G2.5 @ 18000 rpm		Balancing type		tool type 	tool type 	Peso / weight 8.43 kg				
Tolleranze non quotate: UNI EN 22768 fH Smussi non quotati: 0.5mm				 = 0.8 	 = 3.2 	 = 12.5 	 = 	Title 4147-C-DB-P-ER25-RH		
rev. n° 00	description Emissione				date 18/05/2010	signature D. Bottarel		Customer Catalogo		
								Drawing code COM41470244		
drawn - date D. Bottarel - 18/05/2010		approved - date S. Perli - 18/05/2010		checked - date S. Perli - 18/05/2010		sostituisce il dis. n°1340 cod. 5Com41470244.dwg		foglio / sheet 1 / 1		
				sostituito dal				scala 1:2		

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale e/o parziale e la divulgazione a terzi, senza nostro esplicito consenso scritto, verrà perseguito secondo i termini di legge in vigore.