
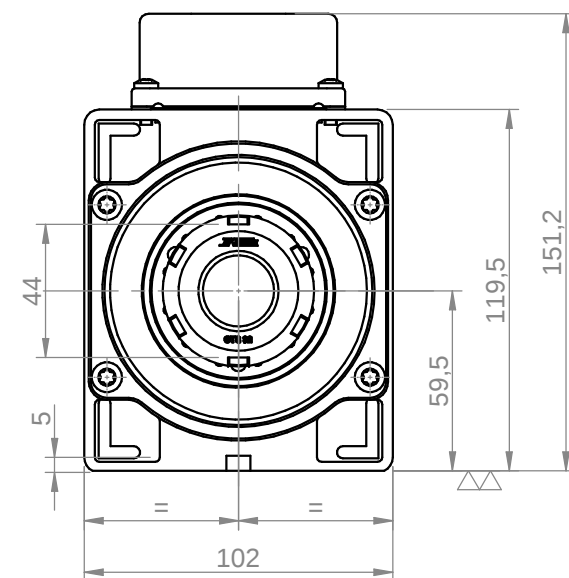
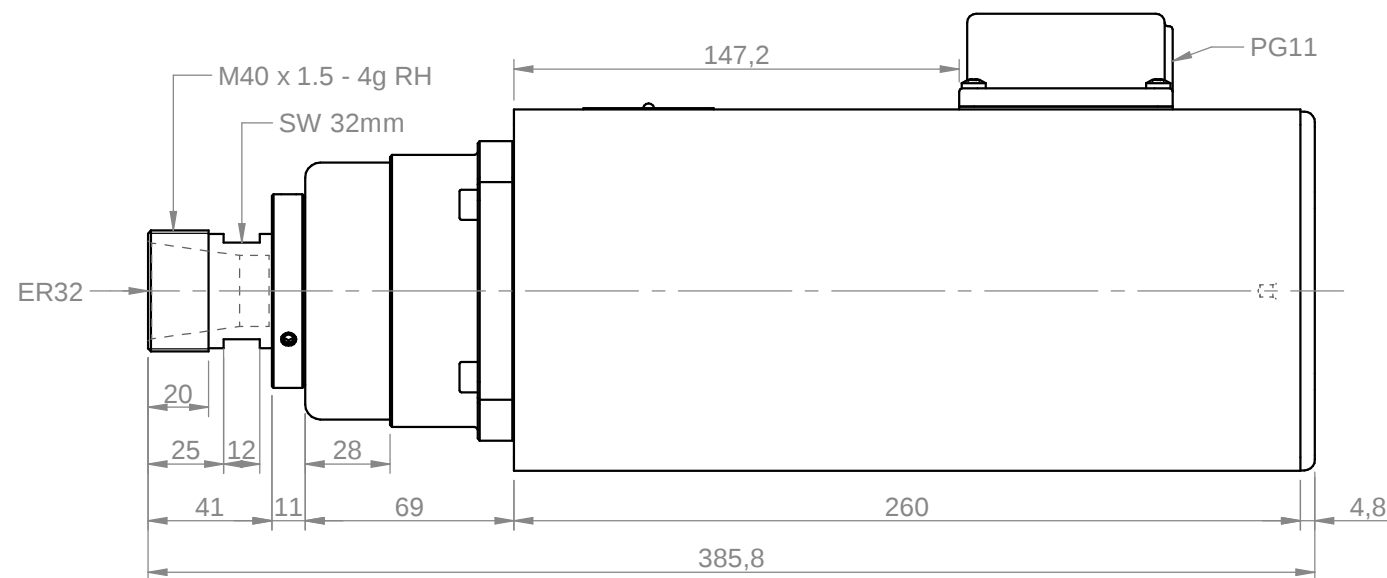
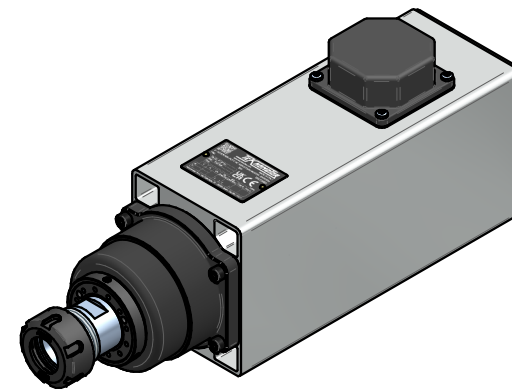


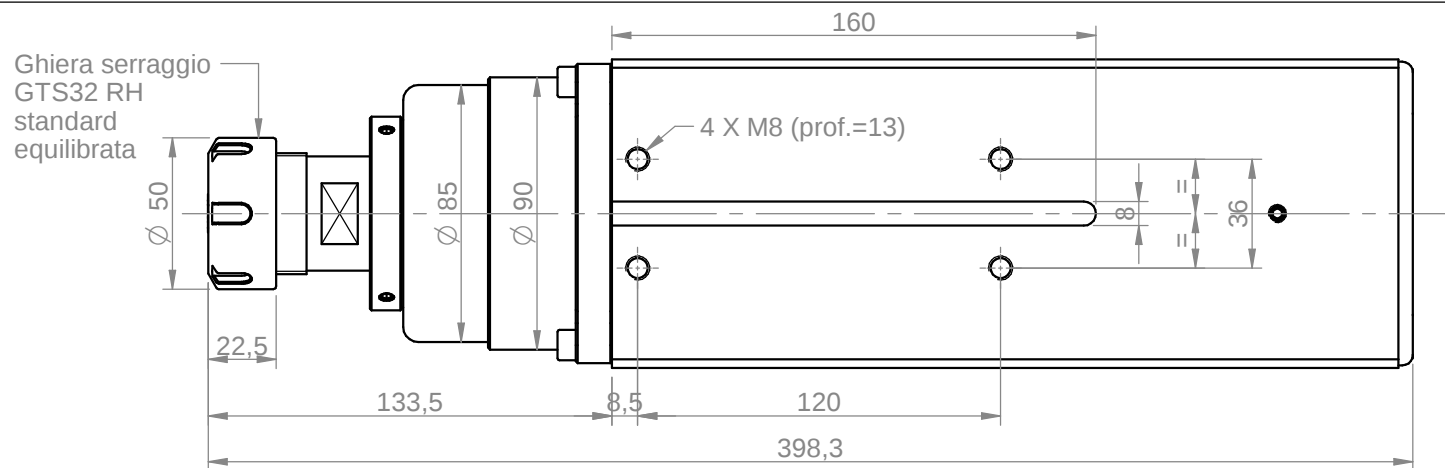

Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]
5.6	S1	18000	300	220	20.0	380	11.5
Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]
6000	18000	300	IP54	Ins. Cl. F	Part number on nameplate	COM51600198	
Min speed [rpm]	Max speed [rpm]	Max freq. [Hz]	Protection	Ins. Cl.	Part number on nameplate	COM51600198	
6000	18000	300	IP54	Ins. Cl. F	Part number on nameplate	COM51600198	
Balancing according to ISO 1940 - G2.5 @ 18000 rpm	Balancing type	Tool type	Tool type	Peso / weight	14.76 kg	Title	5160-D-DB-P-ER32-RH
rev. n°	description	date	signature	Customer	Catalogo	Drawing code	COM51600198
00	Emissione	12/01/2015	D. Bottarel				
drawn - date	approved - date	checked - date	sostituisce il	foglio / sheet	scala		A4
D. Bottarel - 12/01/2015	S. Perli - 12/01/2015	S. Perli - 12/01/2015	sostituito dal	1 / 1	n.d.		

TEKNOMOTOR

Teknomotor S.r.l.
Via Argenega 31, I-32038 Quero Vas (BL)
www.teknomotor.com

5160-D-DB-P-ER32-RH

Customer
Catalogo

Tolleranze non quotate: UNI EN 22768 fH
Smussi non quotati: 0.5 mm
Rugosità secondo UNI ISO 1302