
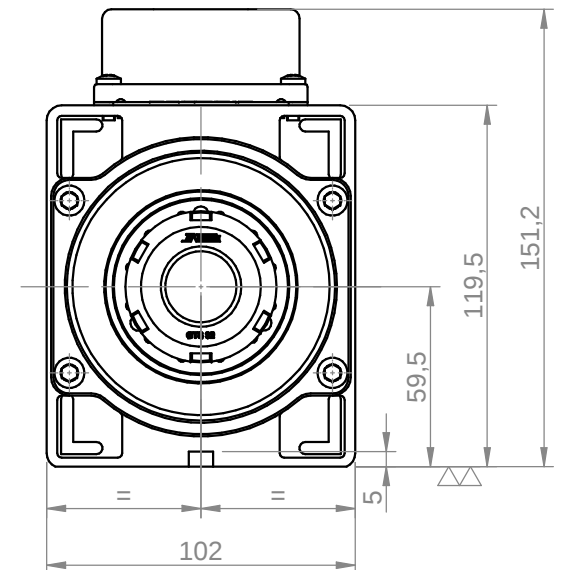


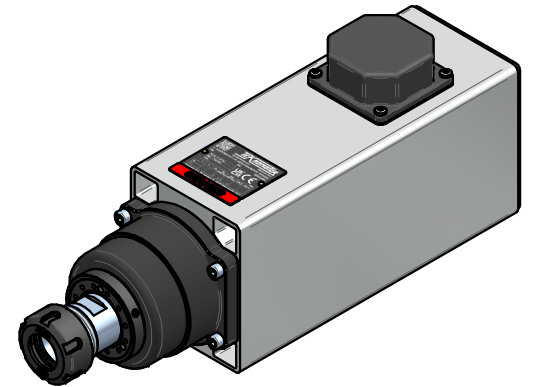

Power [kW] 5.6	Duty Cycle S1	Base speed [rpm] 18000	Base freq. [Hz] 300	Base voltage Δ [V] 220	Absorb. Δ [A] 20.0	Base voltage Y [V] 380	Absorb. Y [A] 11.5	 Teknomotor S.r.l. Via Argenega 31, I-32038 Quero Vas (BL) www.teknomotor.com						
Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]							
Min speed [rpm] 6000		Max speed [rpm] 24000	Max freq. [Hz] 400	Protection IP54	Ins. Cl. F	Part number on nameplate COM51600454								
Balancing according to ISO 1940 - G2.5 @ 24000 rpm		Balancing type		tool type 	tool type 	Peso / weight 15.03 kg								
								Title 5160-D-2DB-P-ER32-HY-RH						
rev. n° 00	description Emissione					date 12/04/2019	signature D. Bottarel	Customer Catalogo			Drawing code COM51600454			
								Tolleranze non quotate: UNI EN 22768 fH Smussi non quotati: 0.5 mm Rugosità secondo UNI ISO 1302						
drawn - date D. Bottarel - 12/04/2019		approved - date S. Perli - 12/04/2019		checked - date S. Perli - 12/04/2019		sostituisce il sostituito dal			foglio / sheet 1 / 1		scala n.d.		A4	

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale e/o parziale e la divulgazione a terzi, senza nostro esplicito consenso scritto, verrà perseguito secondo i termini di legge in vigore.