
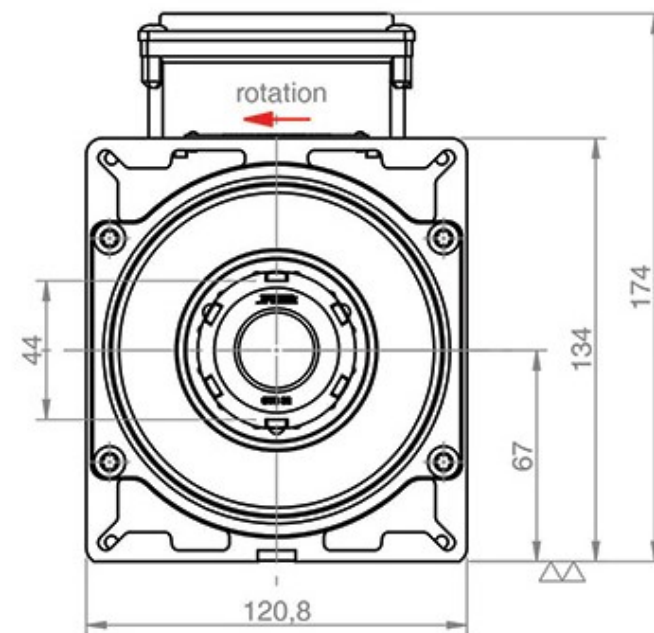
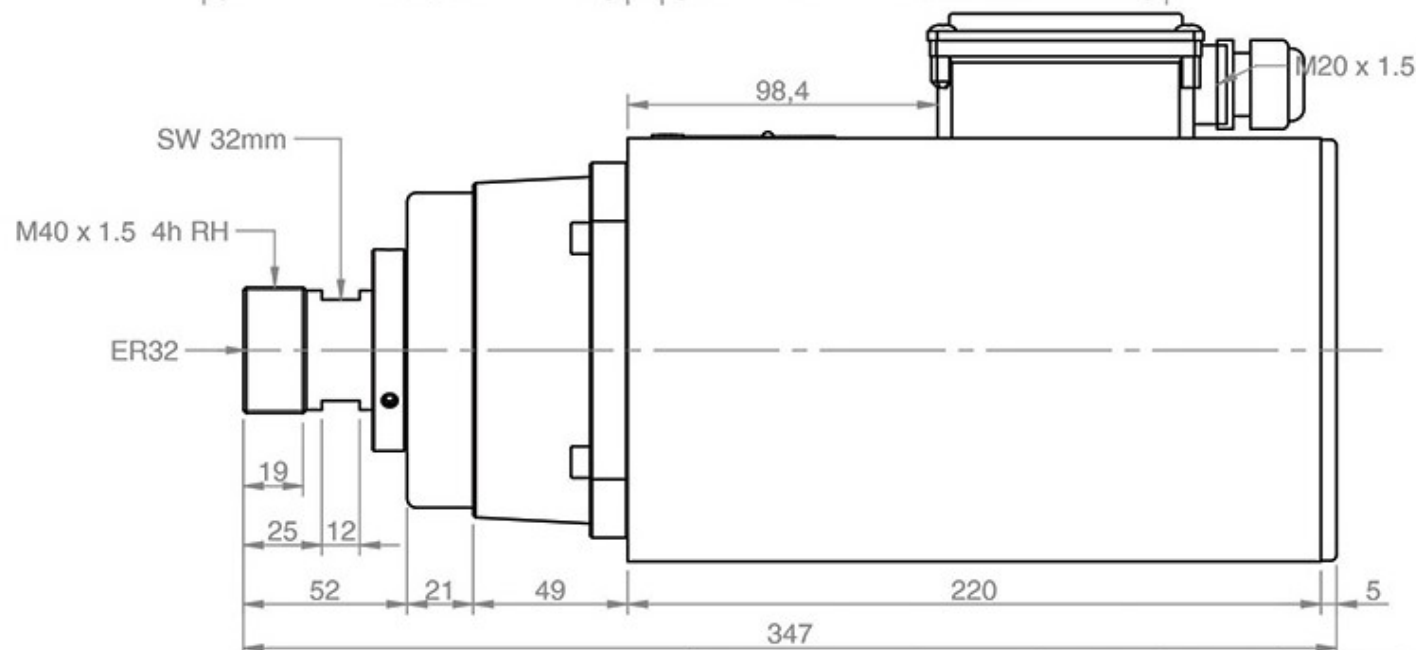
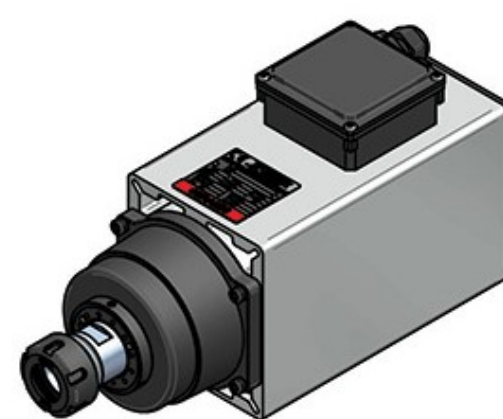


Ghiera serraggio
GTS32 RH

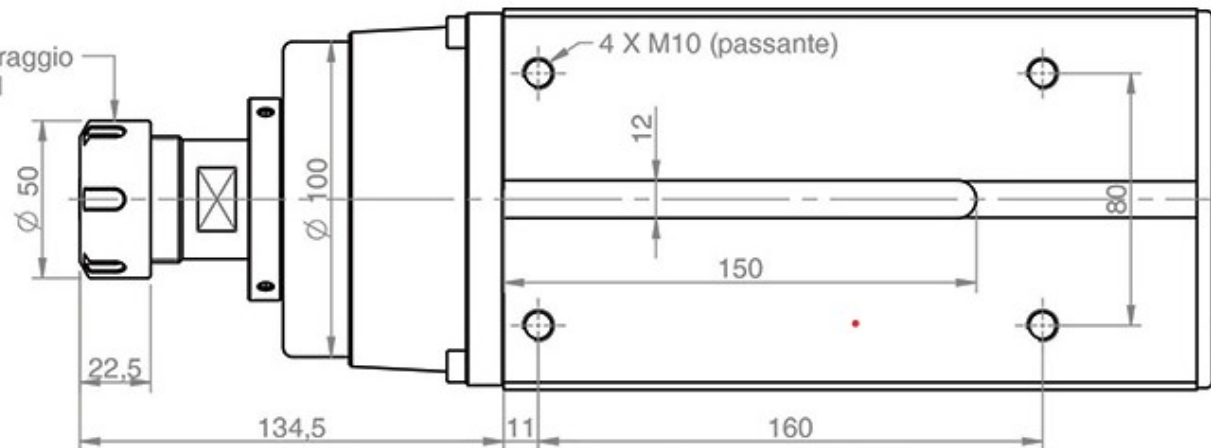

Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]	 Teknomotor S.r.l. Via Argenega 31, I-32038 Quero Vas (BL) www.teknomotor.com				
4.5	S1	18000	300	220	18.0	380	10.0					
Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]					
Min speed [rpm]		Max speed [rpm]	Max freq. [Hz]	Protection	Ins. Cl.	Part number on nameplate						
6000		18000	300	IP50	F	COM60670010						
Balancing according to ISO 1940 - G2.5 @ 18000 rpm		Balancing type		tool type 	tool type 	Peso / weight		Title				
						18.14 kg		6067-A-DB-P-ER32-HY-RH				
rev. n°	description					date	signature	Customer	Drawing code			
01	Montati cuscinetti ceramici					31/03/2017	E. Gaspari	Catalogo	COM60670010			
00	Emissione					31/03/2015	D. Bottarel	Tolleranze non quotate: UNI EN 22768 fH Smussi non quotate: 0.5 mm Rugosità secondo UNI ISO 1302				
drawn - date		approved - date		checked - date		sostituisce il		foglio / sheet	scala			A4
E. Gaspari - 31/03/2017		S. Perli - 31/03/2017		S. Perli - 31/03/2017		sostituito dal		1 / 1				
									n.d.			

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale e/o parziale e la divulgazione a terzi, senza nostro esplicito consenso scritto, verrà perseguito secondo i termini di legge in vigore.