
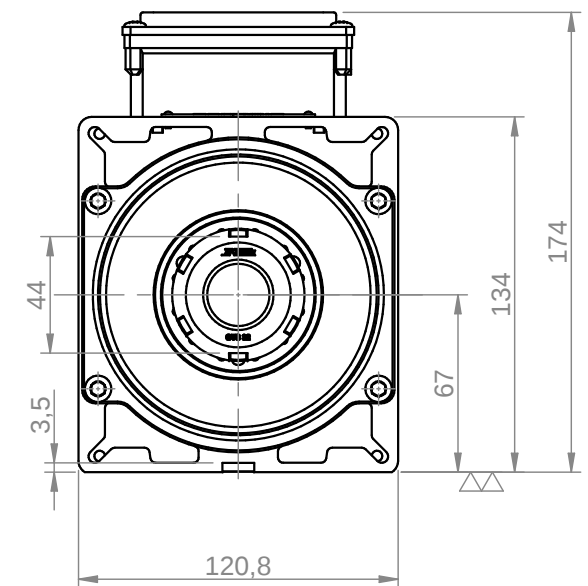
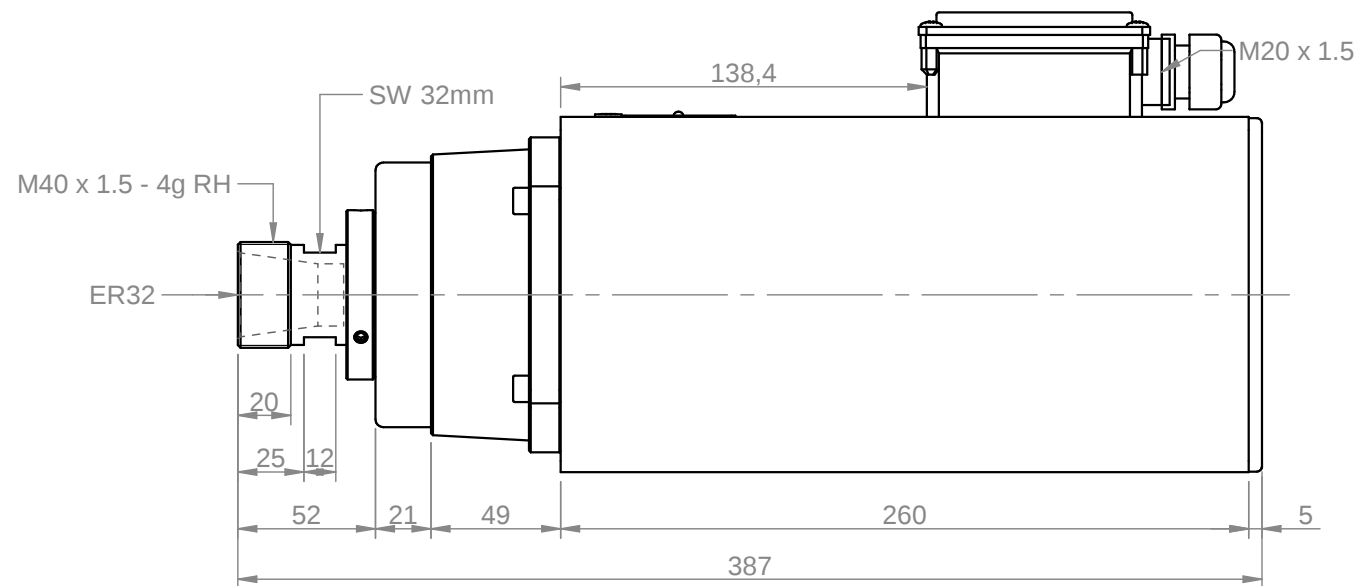
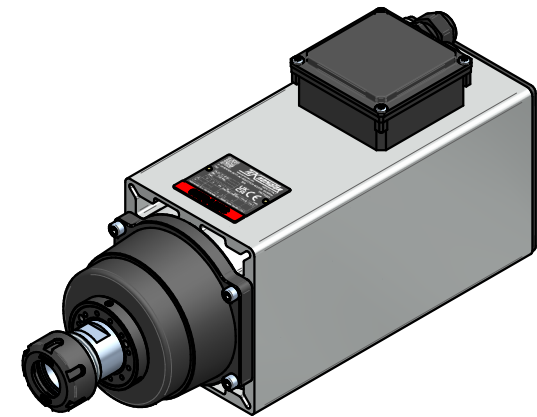


Ghiera serraggio
GTS32 RH
standard
equilibrata

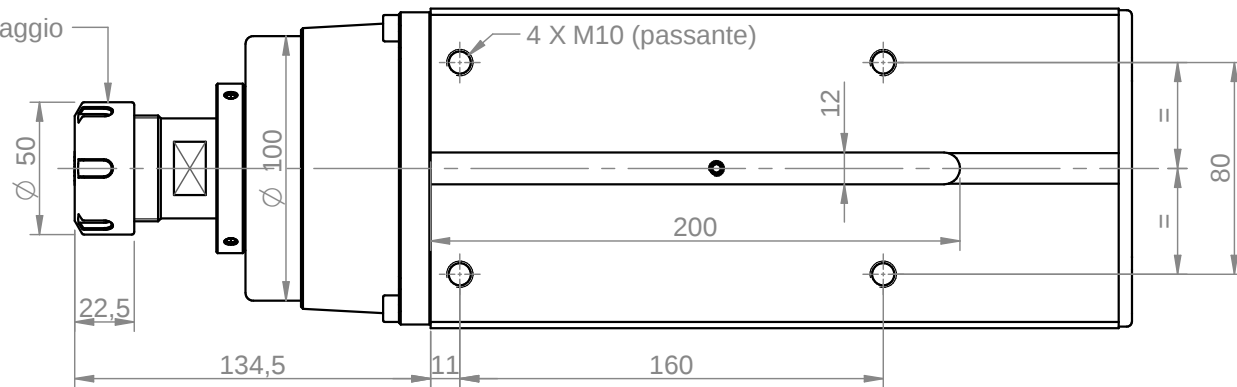

Power [kW] 7.0	Duty Cycle S1	Base speed [rpm] 18000	Base freq. [Hz] 300	Base voltage Δ [V] 220	Absorb. Δ [A] 25.0	Base voltage Y [V] 380	Absorb. Y [A] 14.5	 Teknomotor S.r.l. Via Argenega 31, I-32038 Quero Vas (BL) www.teknomotor.com				
Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]					
Min speed [rpm] 6000		Max speed [rpm] 18000	Max freq. [Hz] 300	Protection IP54	Ins. Cl. F	Part number on nameplate COM60670012						
Balancing according to ISO 1940 - G2.5 @ 18000 rpm		Balancing type		tool type 	tool type 	Peso / weight 20.61 kg					Title 6067-D-DB-P-ER32-HY-RH	
rev. n°	description					date	signature	Customer		Drawing code		
01	Cuscinetto posteriore da 6205 a 6204					07/06/2017	E. Gaspari	Catalogo		COM60670012		
00	Emissione					20/11/2015	D. Bottarel	Tolleranze non quotate: UNI EN 22768 fH Smussi non quotati: 0.5 mm Rugosità secondo UNI ISO 1302				
drawn - date		approved - date		checked - date		sostituisce il		foglio / sheet		scala		A4
E. Gaspari - 07/06/2017		S. Perli - 07/06/2017		S. Perli - 07/06/2017		sostituito dal		1 / 1				

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale e/o parziale e la divulgazione a terzi, senza nostro esplicito consenso scritto, verrà perseguito secondo i termini di legge in vigore.