
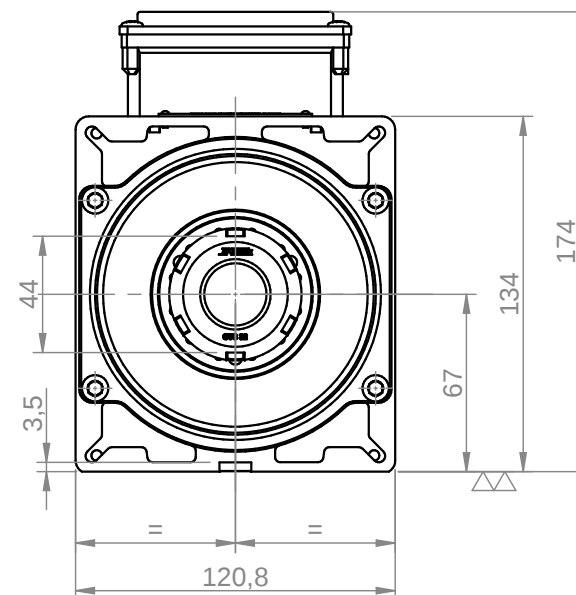
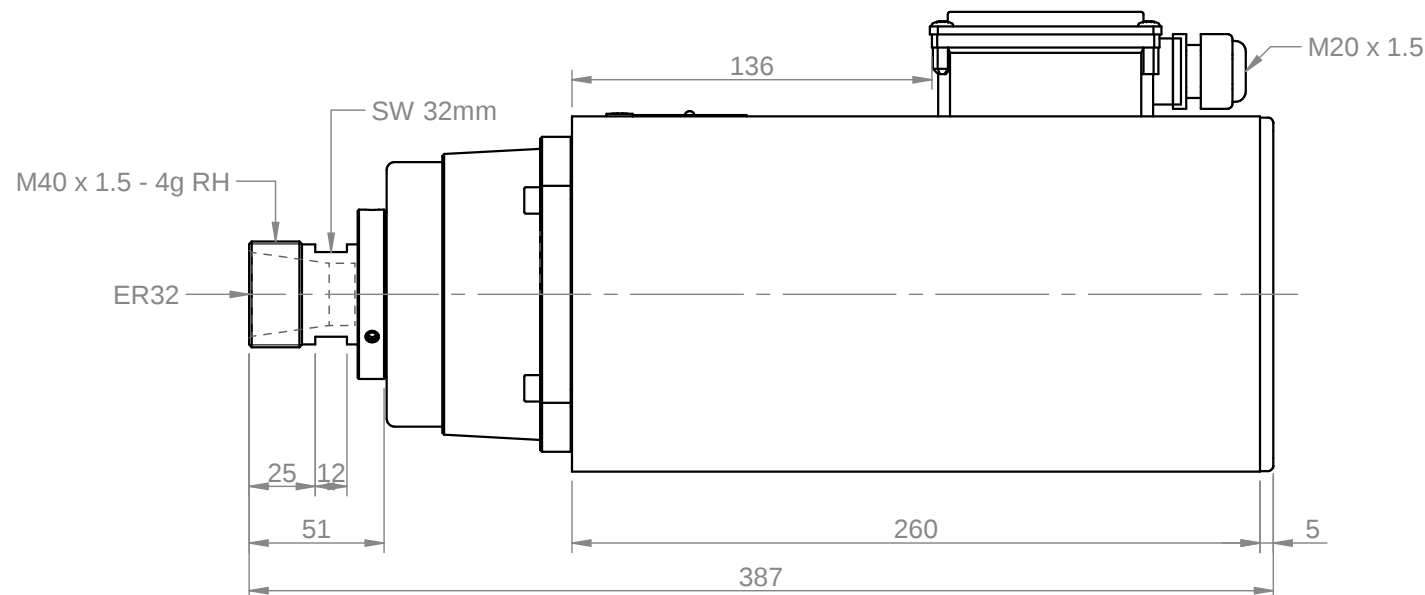
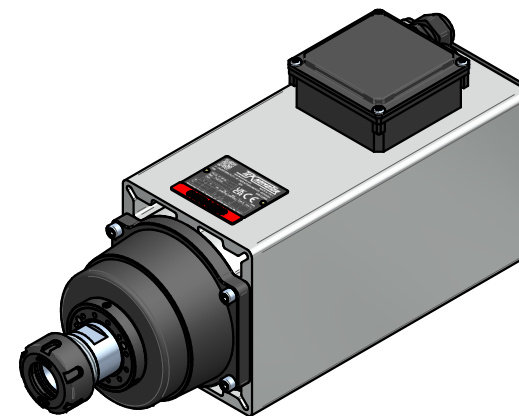


Ghiera serraggio
GTS32 RH
standard
equilibrata

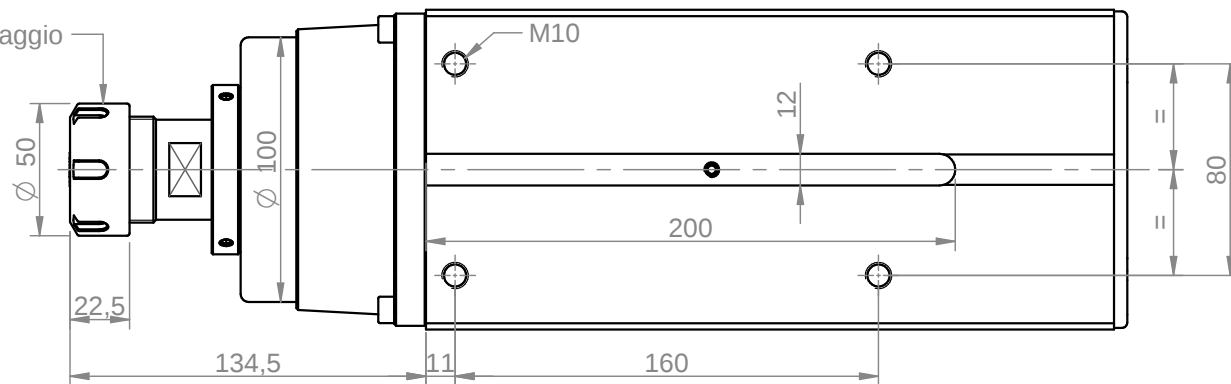

Power [kW] 7.0	Duty Cycle S1	Base speed [rpm] 18000	Base freq. [Hz] 300	Base voltage Δ [V] 220	Absorb. Δ [A] 25.0	Base voltage Y [V] 380	Absorb. Y [A] 14.5	 Teknomotor S.r.l. Via Argenega 31, I-32038 Quero Vas (BL) www.teknomotor.com			
Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]				
Min speed [rpm] 6000		Max speed [rpm] 24000	Max freq. [Hz] 400	Protection IP54	Ins. Cl. F	Part number on nameplate COM60670027					
Balancing according to ISO 1940 - G2.5 @ 24000 rpm		Balancing type		tool type 	tool type 	Peso / weight 20.68 kg					
						Title 6067-D-2DB-P-ER32-HY-RH					
rev. n° 01	description Modificato filetto posteriore da M20x1.5 a M12x1					date 10/06/2019	signature D. Bottarel	Customer Catalogo	Drawing code COM60670027		
00	Emissione					20/02/2015	D. Bottarel	Tolleranze non quotate: UNI EN 22768 fH Smussi non quotati: 0.5 mm Rugosità secondo UNI ISO 1302			
drawn - date D. Bottarel - 10/06/2019		approved - date S. Perli - 10/06/2019		checked - date S. Perli - 10/06/2019		sostituisce il		foglio / sheet 1 / 1	scala n.d.		A4
						sostituito dal					