

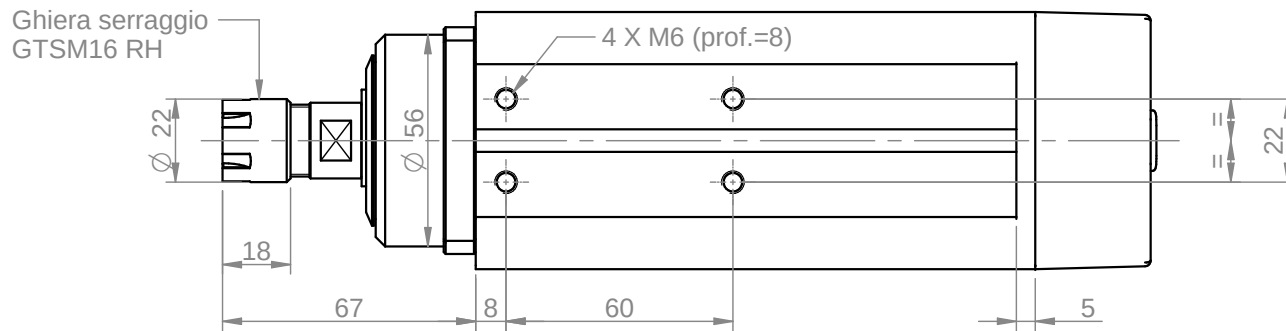
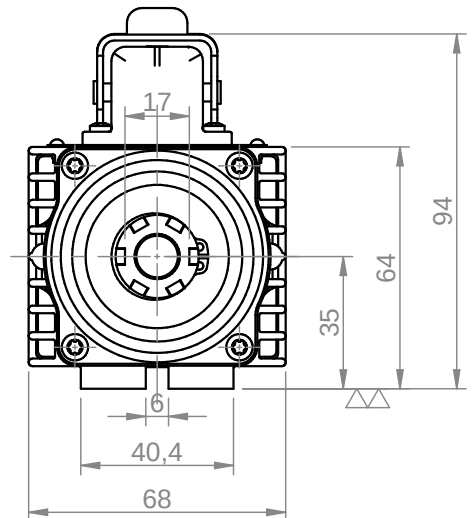


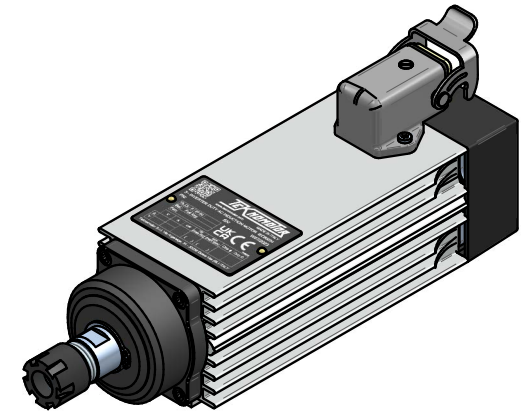

Harting HAN 3A 3P+E screw termination male insert - 09200032611

Harting metal angled bulkhead mounted housing - 09200030801

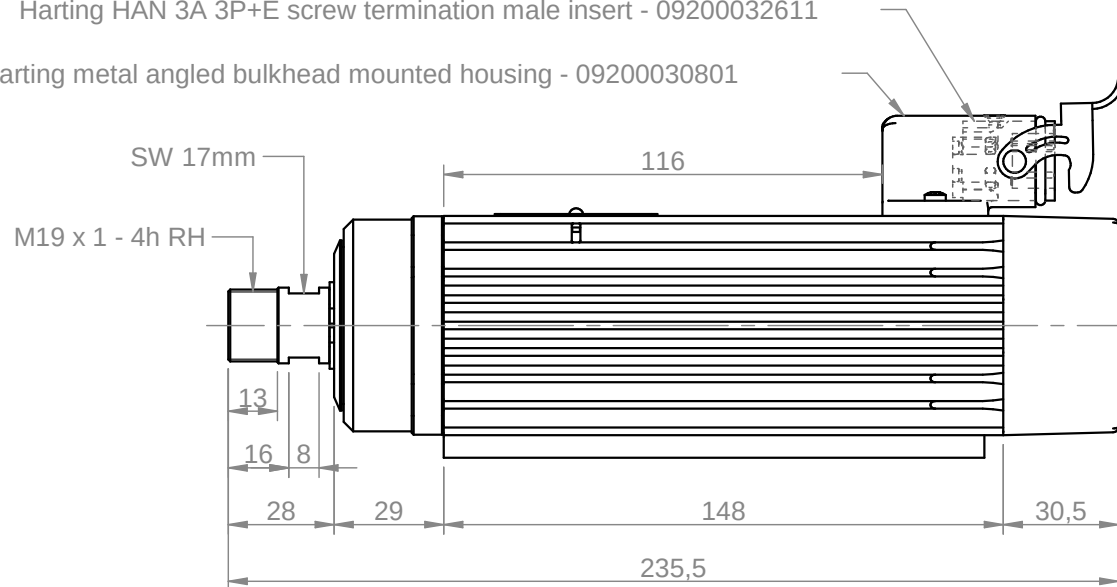

Power [kW] 0.6	Duty Cycle S1	Base speed [rpm] 18000	Base freq. [Hz] 300	Base voltage Δ [V] 220	Absorb. Δ [A] 2.7	Base voltage Y [V]	Absorb. Y [A]	 Teknomotor S.r.l. Via Argenega 31, I-32038 Quero Vas (BL) www.teknomotor.com					
Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]						
Min speed [rpm] 9000		Max speed [rpm] 21600	Max freq. [Hz] 360	Protection IP54	Ins. Cl. F	Part number on nameplate COMC0350060							
Balancing according to ISO 1940 - G2.5 @ 21600 rpm			Balancing type		tool type full key 	tool type half key 	Peso / weight 2.98 kg		Title C35-C-SB-P-ER16-RH				
rev. n° 00	description Emissione					date 13/09/2013	signature D. Bottarel	Customer Catalogo		Drawing code COMC0350060			
								Tolleranze non quotate: UNI EN 22768 fH Smussi non quotati: 0.5 mm Rugosità secondo UNI ISO 1302					
drawn - date D. Bottarel - 13/09/2013		approved - date S. Perli - 13/09/2013		checked - date S. Perli - 13/09/2013		sostituisce il			foglio / sheet 1 / 1		scala 1:2		A4
						sostituito dal							