
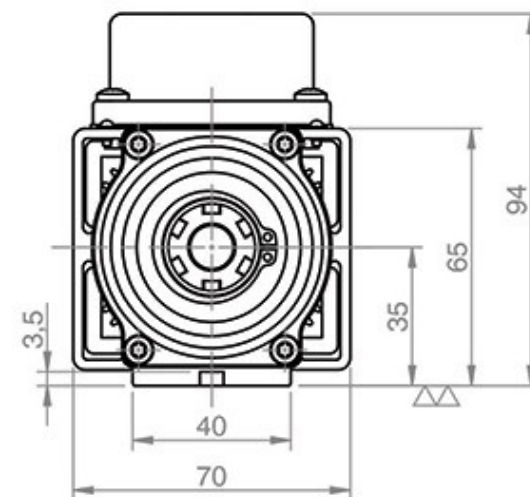
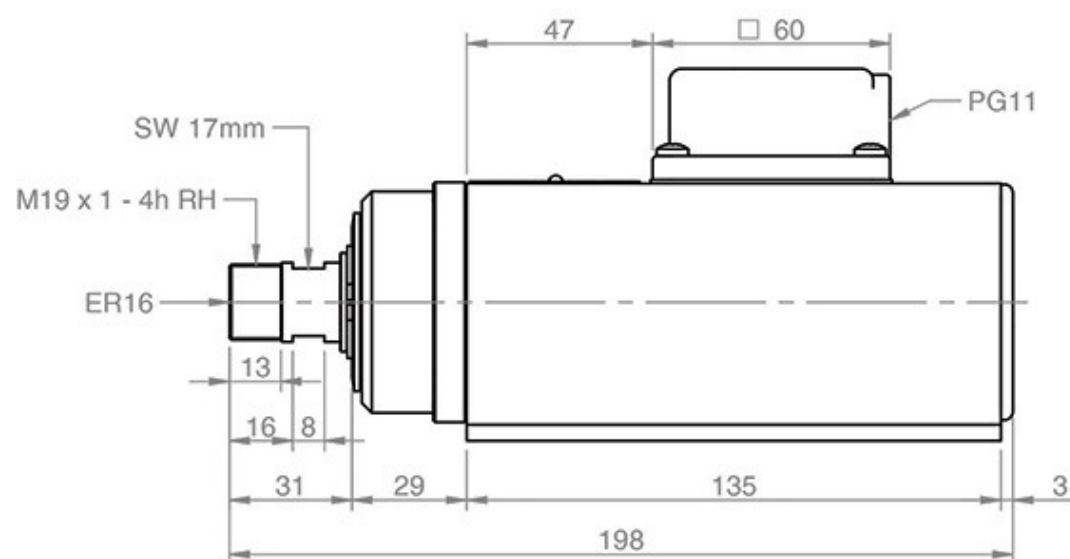
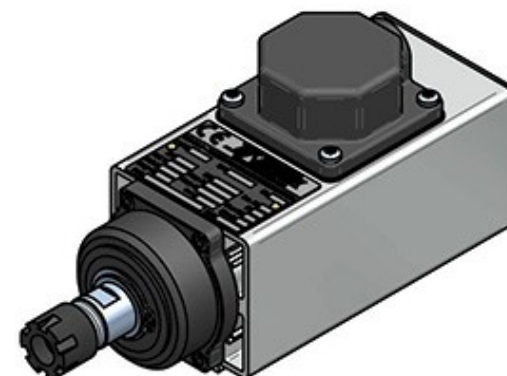


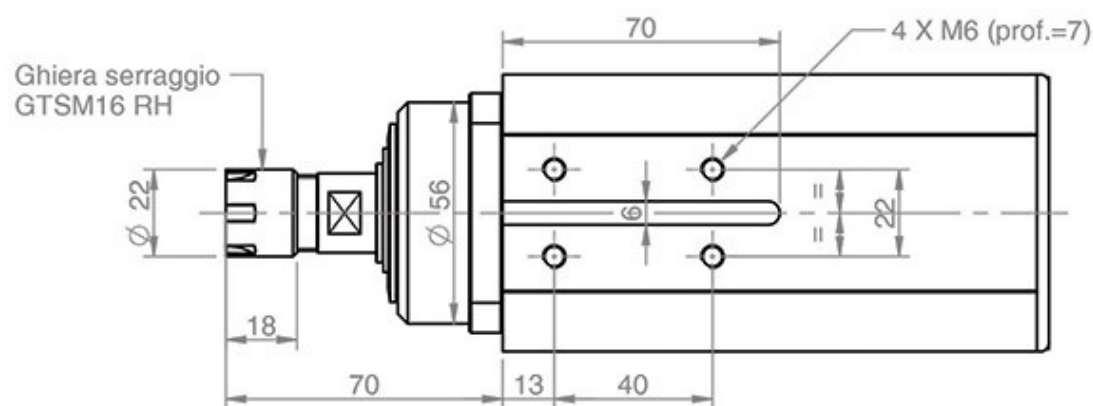

Power [kW] 0.33	Duty Cycle S1	Base speed [rpm] 18000	Base freq. [Hz] 300	Base voltage Δ [V] 220	Absorb. Δ [A] 2.1	Base voltage Y [V] 380	Absorb. Y [A] 1.2	 Teknomotor S.r.l. Via Argonaga 31, I-32038 Quero Vas (BL) www.teknomotor.com		
Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]			
Min speed [rpm] 9000		Max speed [rpm] 18000	Max freq. [Hz] 300	Protection IP54	Ins. Cl. F	Part number on nameplate COMNC350280				
Balancing according to ISO 1940 - G2.5 @ 18000 rpm		Balancing type		tool type  full key	tool type  half key	Peso / weight 2.43 kg		Title NC35-A-SB-P-ER16-RH		
rev. n° 00	description Emissione				date 16/03/2015	signature D. Bottarel	Customer Catalogo		Drawing code COMNC350280	
							Tolleranze non quotate: UNI EN 22768 fH Smussi non quotati: 0.5 mm Rugosità secondo UNI ISO 1302			
drawn - date D. Bottarel - 16/03/2015		approved - date S. Perli - 16/03/2015		checked - date S. Perli - 16/03/2015		sostituisce il		foglio / sheet 1 / 1		
				sostituito dal		scala 1:2		 A4		